

## HIGH BAY TUBE-- T8 Tube Light in 15 degree

### Description

One single tube to achieve all common angles like 15,20,25,30,35,45,60, to save big cost for stocking all kinds of angle, which always in need but not in mass

It is linear light--Long sharp beam ensure light goes to where it is needed

More importantly, it is a T8 tube--Easy adapt to most common used existing T8 fixture

### Features

- Sharp beam makes light goes to where it is needed
- It functions as spot + high bay lighting
- It is directional lighting + 4 times stronger lux
- It is linear lighting
- Asymmetric/Symmetric in one lamp
- Beam angle seamless adjustable
- All-in-one lamp from 15 ° to 60 °
- Adjustable beam angle by end users powered by rotatable end caps
- 185 Gram per meter aluminum ensure excellent thermal control
- UL certificated factory
- DLC(DesignLights Consortium) qualified
- Super bright SMD3030 LEDs with LM80 report
- Life to 70% lumen maintenance-50,000 hours
- **5 Year warranty**
- **Factory direct**

### Applications

Workshops: working line, especially where there is high machines moving around

Warehouse: perfect light beam

Supermarket: direct light to the shelf,only.

Stadium: to replace high bay lamp.


## Parameters 1

Model No.	Diffuser	Watt	Lumens	Lm/W	Color	Beam	Life(hrs)	Voltage	No. of LEDs	Length
<b>LTTD12030CL/57A</b>	Clear	32W	*3600	113	5700K	15°	50,000	100-277V	48	4ft
<b>LTTD12030CL/60A</b>	Clear	32W	*3700	115	6000K	15°	50,000	100-277V	48	4ft
<b>LTTD12030CL/60B</b>	Clear	32W	*3300	103	6000K	15°	50,000	100-277V	24	4ft



Actual Products May Differ from Picture

## Length:


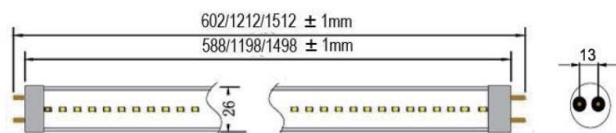


Length with 1mm tolerance.

## Parameters 2

Model Number	LTTD120	LTTD120	LTTD120
Sub Model Order Number	30CL57A	30CL60A	30CL60B
Power Consumption (Watt)	32		
Input Voltage	85-265V		
Power Supply	Non-Isolated		
Power Factor	≥0.9		
Beam Angle	15°		
LED Light Source	SMD3030		
Color Rendering Index	>83Ra		
Number of LEDs	48		
Diffuser	CLEAR		
Color	5700k	6000k	6000k
Luminous Efficiency (Lm/W)	113	115	103
Lumens	3616	3680	3296
Pin Type/Lamp holder	T8 G13		
Dimension Length	1200mm / 4ft		
Lamp Body Shape	Circular		
Shell Material	1/2 Aluminum Alloy		
Working Temperature	-20°C ~ 40°C		
Working Humidity	<90%		
Lifespan	≥50,000hours, Lumens maintenance 97% after 6000hrs		
Working Mode	By pass		
Net Weight	450g	0.99b	
Carton/30pcs	Size	L 1.26*W 0.23*H 0.24m	L 4.13*W 0.75*H 0.79ft
	Gross Weight	14Kg	30.86lbs

## Luminaire Photometric Test

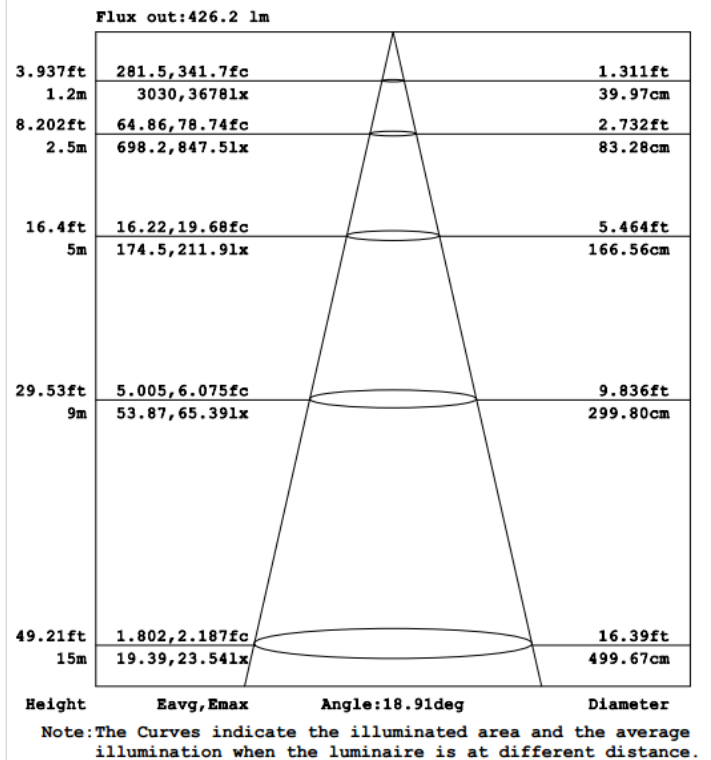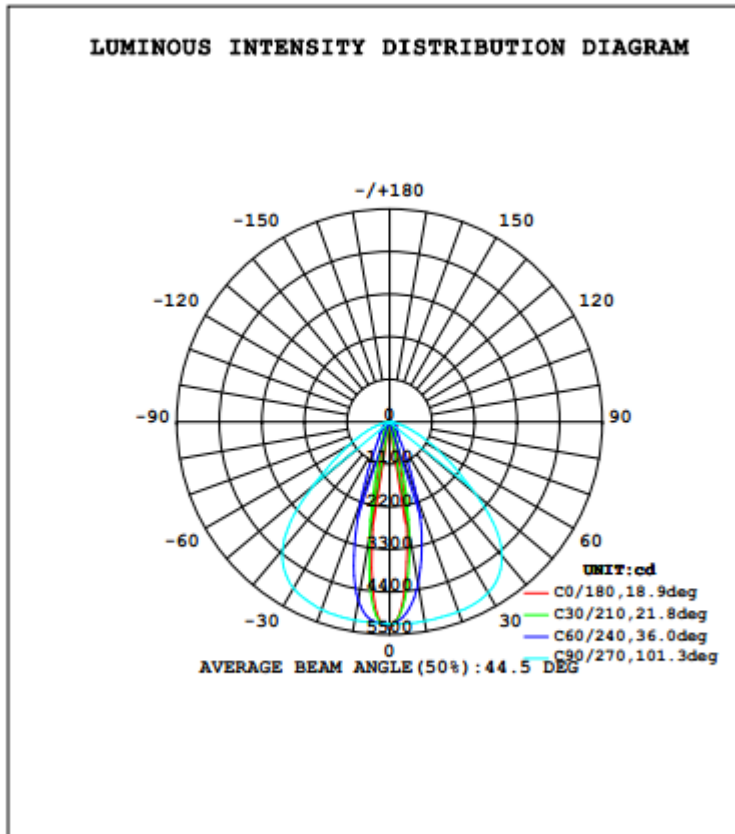

## Packing

Tube Model	Dimension	Gross Weight
LTT120	1260*240*230mm 30PCS	14KG

## Warranty

- 3 years limited warranty from the shipping date
- Liteto is responsible for the field products due to product quality issue, refund or send out new ones
- Liteto will bare cost of maintains if the customer can help fix the lights
- Liteto is not responsible for any incorrect installation or any artificial damage.

File Version 01. 2016.06.09

END.